







# UHF RFID ANTENNA CATALOGUE

Image	Specification	Application
	<p><b>Model: T145</b>            Frequency Range: 902-928Mhz            Beam width: 80°/70°            Gain: 5dBi            Polarization: RHCP            Size: 145*145*30mm Connect: N(F)</p>	<p>Access Control, Asset or Warehouse Management</p>
	<p><b>Model: T100</b>            Frequency Range: 902-928Mhz,            Beam Width: 80°/65°,            Gain: 2.5dBi            Polarization: Vertical            Size:100*65mm Connect: SMA(F)</p>	<p>Robot and Drone Scanning Recognition,            Production line fixed-point recognition</p>
	<p><b>Model: T920</b>            Frequency Range: 902-928Mhz            Beam Width: 60°/18°            Gain: 12dBi            Polarization: RHCP            Size: 920*160*30mm Connect: N(F)</p>	<p>File Cabinets, Warehouse shelves,            Access control, Livestock management,            Container truck long range identification</p>
	<p><b>Model: TC09</b>            Frequency Range: 902-928Mhz            Beam Width: 60°/55°            Gain: 9dBi            Polarization: RHCP            Size: 255*255*30mm Connect: N(F)</p>	<p>Access control, Parking lot Management            Retail &amp; Garment industry</p>



# Antenna Models...1





Image	Specification	Application
	<p><b>Model: T445</b>            Frequency Range: 902-928Mhz            Beam width: 40°/38°            Gain: 12dBi            Polarization: Vertical            Size: 445*445*30mm Connect: N(F)</p>	<p>Intelligent Transport and Parking Systems, Automatic Vehicle Identification.</p>
	<p><b>Model: T030</b>            Frequency Range: 902-928Mhz,            Beam Width: 50°/50°            Gain: 12dBi            Polarization: Horizontal            Size:500*270*60mm Connect: N(F)</p>	<p>Electronic License Plates, Portals, Access Control Projects</p>
	<p><b>Model: TH08</b>            Frequency Range: 902-928Mhz            Beam Width: 70°/45°            Gain: 8dBi            Polarization: Horizontal            Size: 460*100*23mm Connect: SMA(F)</p>	<p>Production Line Applications</p>
	<p><b>Model: TH06</b>            Frequency Range: 902-928Mhz            Beam Width: 120°/55°            Gain: 6dBi            Polarization: Horizontal            Size: 250*100*23mm Connect: SMA(F)</p>	<p>Production Line Applications</p>





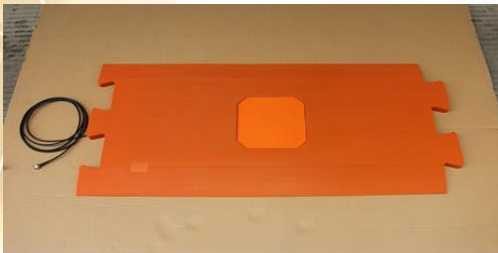

Image	Specification	Application
	<p><b>Model: TH10</b>            Frequency Range: 902-928Mhz            Beam: width: 90°/38°            Gain: 10dBi            Polarization: Horizontal            Size: 920*100*23mm Connect: SMA(F)</p>	<p>Production Line Applications</p>
	<p><b>Model: T070</b>            Frequency Range: 902-928Mhz,            Beam Width: 70°/38°            Gain: 10dBi            Polarization: RHCP            Size:1,260*500*20mm Connect: TNC(M)</p>	<p>Supplied with: 3m 50-7 Cable            Race Timing</p>
	<p><b>Model: T060 (Black)</b>            Frequency Range: 902-928Mhz            Beam Width: 60°/60°            Gain: 8dBi            Polarization: RHCP            Size: 1,090*520*30mm Connect: TNC(M)</p>	<p>Supplied with: 3m LMR200 Cable            Race Timing</p>
	<p><b>Model: T040</b>            Frequency Range: 902-928Mhz            Beam Width: 40°/38°            Gain: 12dBi            Polarization: RHCP            Size: 400*400*30mm Connect: N(F)</p>	<p>Intelligent Transport and Parking            Systems            Automatic Vehicle Identification</p>



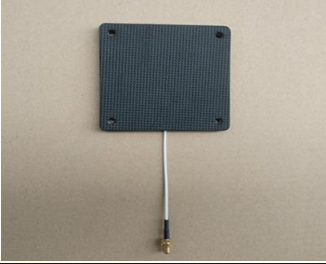




Image	Specification	Application
	<p><b>Model: TC102</b>            Frequency Range: 902-928Mhz            Beam width: 70°/65°            Gain: 12dBi            Polarization: RHCP            Size: 102*102*6mm Connect: SMA(F)</p>	<p>Supplied With RG316 Cable 30cm            Car and Tyre Production line, Counter Management, Drone scan and Identification</p>
	<p><b>Model: TC270</b>            Frequency Range: 902-928Mhz,            Gain: 9dBi            Polarization: RHCP            Size:270*270*60mm Connect: SMA(M)</p>	<p>Supplied With RG316 Cable 20cm            Access control, Intelligent Parking Management, Logistics &amp; Warehouse, Production line fixed-point recognition, Conveyor Belt, Baggage, Document and Parcel Sorting</p>
	<p><b>Model: TC260</b>            Frequency Range: 902-928Mhz            Gain: 3.5dBi            Polarization: RHCP            Size: 260*125*5mm Connect: SMA(F)</p>	<p>Cash Counter Management</p>
	<p><b>Model: TC530</b>            Frequency Range: 902-928Mhz            Gain: 5.5dBi            Polarization: RHCP            Size: 530*530mm Connect: SMA(F)</p>	<p>Medicine Counter Management</p>



Image	Specification	Application
	<b>Model: TC05</b> Frequency Range: 902-928Mhz Gain: 5dBi Polarization: RHCP Size: 520*130*2mm Connect: SMA(F)	Jewellery Management, Shelf Solutions, Library Solutions

Please contact Taggit for pricing and order lead times.



## **KZN**

**Address:**

**42 St. Andrews Drive  
Durban North  
4015  
KZN**

**Contact:**

**[craig@taggitsa.co.za](mailto:craig@taggitsa.co.za)**

**Telephone:**

**Office: +27 31 560 0101  
Mobile: +27 82 903 2765  
Fax: +27 86 241 1047**

**Websites: [www.taggitsa.co.za](http://www.taggitsa.co.za)**

## **Gauteng**

**Address:**

**Regus Woodmead  
Building 2,  
Country Club Estate, Woodmead,  
Gauteng**

**Contact:**

**[jeremy@taggitsa.co.za](mailto:jeremy@taggitsa.co.za)**

**Telephone:**

**Office:  
Mobile: +27 82 857 0227  
Fax:**

**Websites: [www.taggitsa.co.za](http://www.taggitsa.co.za)**

